

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 September 2004 (23.09.2004)

PCT

(10) International Publication Number
WO 2004/081961 A1

(51) International Patent Classification⁷: H01H 85/041

(21) International Application Number:
PCT/JP2004/001826

(22) International Filing Date: 18 February 2004 (18.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-066974 12 March 2003 (12.03.2003) JP

(71) Applicant (for all designated States except US): YAZAKI CORPORATION [JP/JP]; 4-28, Mita 1-chome, Minato-ku, Tokyo 108-8333 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): IWATA, Masashi [JP/JP]; c/o Yazaki Parts Co., Ltd., 206-1, Nunobikihara, Haibaracho, Haibara-gun, Shizuoka 421-0492 (JP).

OHASHI, Norihiro [JP/JP]; c/o Yazaki Parts Co., Ltd., 206-1, Nunobikibara, Haibara-cho, Haibara-gun, Shizuoka 421-0492 (JP).


(74) Agents: OGURI, Shohel et al.; Eikoh Patent Office, 13th Floor, ARK Mori Building, 12-32, Akasaka 1-chome, Minato-ku, Tokyo 107-6013 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: FUSE

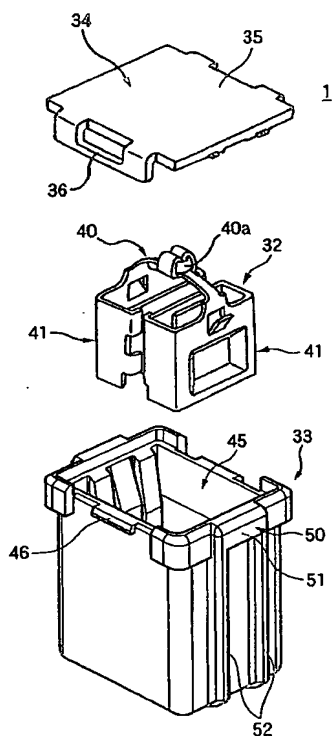

(57) Abstract: A fuse 1 of the present invention includes a fuse body 32, a housing 33 which is made of an insulative resin, and receives and holds the fuse body therein, the fuse body being inserted into the housing through an upper opening in the housing, and a cover 34 which is made of an insulative resin, and covers the upper opening in the housing. Retaining portions 50, corresponding respectively to retaining claws 47 of a withdrawing jig for withdrawing the housing, are formed at a side surface of the housing. Therefore, the retaining claws of the withdrawing jig can be positively fixed to the housing, and a relatively large force is not required for the withdrawing operation, and therefore the withdrawing operation can be effected efficiently.